

# BT-330

BITUMEN FLASHING TAPE

# x'traseal®

## TECHNICAL DATA SHEET

REV: 04

Date: 25 April 2024

### DESCRIPTION

**BT-330 Instant Flashing Tape** is a black, versatile, self-adhesive tape, comprising an elastoplastic weatherproof bitumen compound covered by a reinforced aluminium film. Bituminous compound is protected by a siliconized release film.

### FEATURES

- ◆ Easy to apply
- ◆ Weatherproof
- ◆ Outstanding durability
- ◆ Cost saving

### USES

- ◆ Protection: asphalt, brickwork, concrete, fiber cement sheets, metal and plastic materials on roofs and covering in general.
- ◆ Sealing & waterproofing: Glass & plastic window frames, parapets, skylights structures, etc.
- ◆ Repair work: Metal and fiber cement sheets roofing, shingles, gutters and metal tube.

*Due to a large variety of different coatings and substrates, we recommend preliminary compatibility tests prior to application to achieve desirable results*

### APPLICATION


- ◆ Surfaces must be clean, dust-free and dry. Rust should be removed.
- ◆ Cracks wider than 3mm should be filled.
- ◆ Remove instant flashing tape from the release paper and press it into position using fingertip pressure.
- ◆ Use a seam roller to smooth over instant flashing tape to ensure good contact is made.

### PHYSICAL PROPERTIES

Surface	Aluminium Foil
Adhesive	Bituminous compound
Liner	Siliconized film
Thickness	1.0mm up to 1.5mm

### WIDTH & LENGTH OF ROLL

Roll width	Roll length
50mm	10 meters (11 yards)
75mm	10 meters (11 yards)
100mm	10 meters (11 yards)
150mm	10 meters (11 yards)
200mm	10 meters (11 yards)
300mm	10 meters (11 yards)

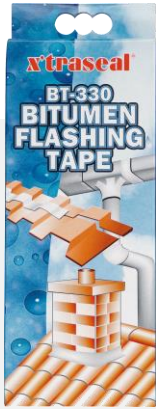

# BT-330

BITUMEN FLASHING TAPE

# x'traseal®

## TECHNICAL DATA SHEET

REV: 04

Date: 25 April 2024

### SPECIFICATION

Tensile strength (ASTM D 1000)	>40 N/mm <sup>2</sup>
Elongation (ASTM D 1000)	50 %
Adhesion Strength (on steel, 180° peel, ASTM D 1000)	≥ 40 N/25mm
Application temperature	5°C to 45°C
Service temperature	-20°C to 80°C

### STORAGE

Material should be stored in a dry and cool place between +10°C TO +30°C.

### NOTE

Do not apply instant flashing tape if surface temperature is below 5°C. Instant flashing tape will become brittle if encased in a cementitious mix. Instant flashing tape is not resistant to acid and alkaline.

### CAUTION

Read and understand material safety data sheet of this product before handling or using.

*This information is provided in good faith and is believed accurate based on a review of current composition and information supplied by vendors. No warranty is expressed or implied. Liability is expressly disclaimed.*



MOHM CHEMICAL SDN. BHD. (REG NO 276851-U)  
No. 32, Jalan Temenggong, Off Jalan Tampoi, 81100 Johor Bahru, Johor,  
Malaysia. Tel : +607 333 1222 Fax : +607 332 0545 / 333 7919  
Website: www.xtraseal.com Email: info@mochem.com